


No.	Name	Material
1	Body	A182 F304
2	Stem	A182 F304
3	Joint	A182 F304
4	Packing	PTFE
5	Nut	A182 F304
6	Handwheel	1020
7	Gasket	PTFE
8	Disc	A182 F304
9	Seat	SS304

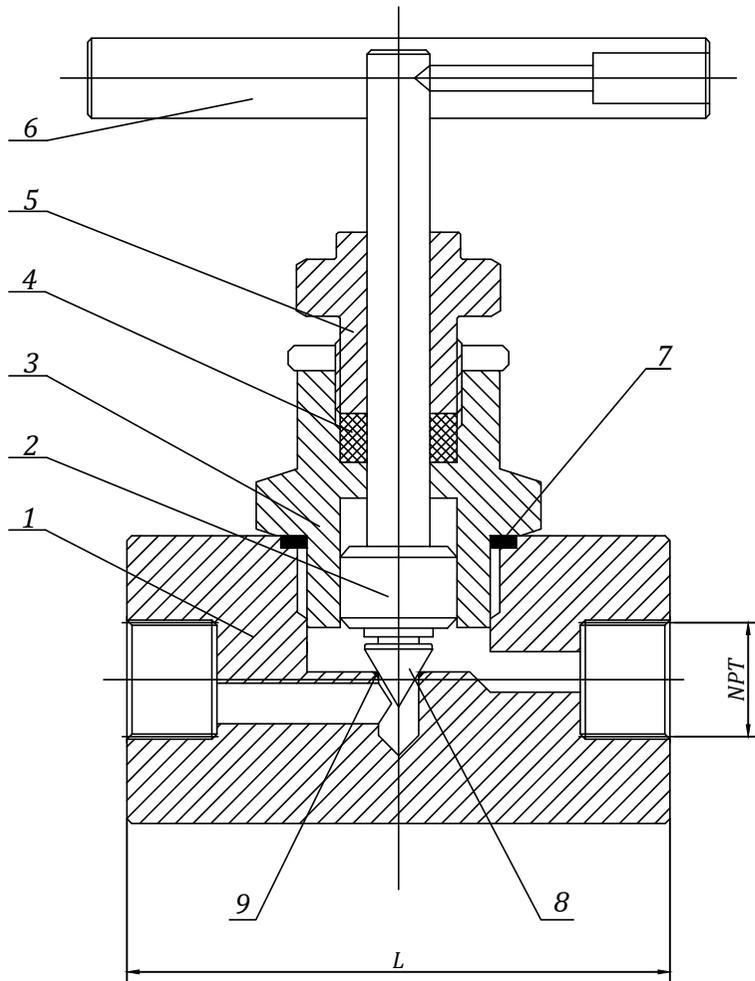

Performance Specification			
Pressure		4500PSI	
Test Pressure	Strength Test	46.5	Mpa
	Seal Test	34.1	
	Air Seal Test	0.6	
Working Temperature		-29~+120°C	
Medium Application		W.O.G	

**Technical Requirements**

1. Design & Manufacture conform to ASME B16.34;
2. Face to Face Dimension conform to FMG'S;
3. Thread size dimension according to ASME B1.20.1;
4. Inspection & Testing conform to API 598;

NOTE: The manufacturer keep the right to upgrade the design for purpose of design optimization but do not change installation dimension and key materials.

<b>CUSTOMER :</b>			
<b>PO NO:</b>			
	DRAWN	YE	
	CHECKED		
	APPROVED		
	DATE	25/06/27	
	INDICATES CRUCIAL FEATURE		
	UNLESS OTHERWISE SPECIFIED		
	1. ALL DIMENSIONS ARE IN MM		
	2. ALL PROJECTION ARE IN THIRD ANGLE		
	3. ALL SHARP EDGES ARE TO BE REMOVED		
	STAMP:		
REV.	DATE	ALT. NO.	SIG. SCALE NTS

**J-VALVES FLUID EQUIPMENT CO., LTD**

**J-VALVES**

Building 2, No. 12 Xingchao Road, Binhai Park, Longwan District, Wenzhou City, Zhejiang, P.R.China 325024  
Phone: +86 0577-56692520

TITLE :- Needle valve VALVE GENERAL ASSEMBLY			
SIZE		TYPE:	
CLASS	4500PSI	NPT	
VPO CODE :	DRAWING NUMBER :-	REV.	SHEET NO:
--	JF-DR-	0	1 OF 1

\*\*\* THIS DRAWING AND DESIGN IS THE PROPERTY OF J-VALVES. IT IS A CONFIDENTIAL DISCLOSURE WHICH MUST NEITHER BE COPIED NOR USED IN ANY MANNER DETRIMENTAL TO THEIR INTERESTS.

CHECKED BY	
PRINTED BY	
OLD DRAWING NO.	
BASED DRAWING NO.	
DATE	SIGNATURE